

Overview

Pointek CLS200 (standard version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe.

Benefits


- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- 3 LED indicators for sensor status, output status, and power
- Suitable for API 2350

Application

Pointek CLS200 standard version has 3 LED indicators with basic relay and solid-state switch alarms. Universal switch for solids/liquids and interface.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 250 V AC/DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).


- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

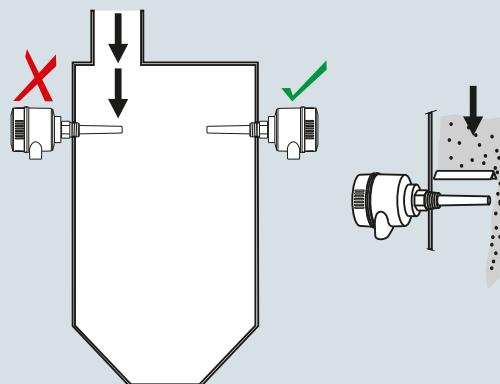Configuration**Installation**

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

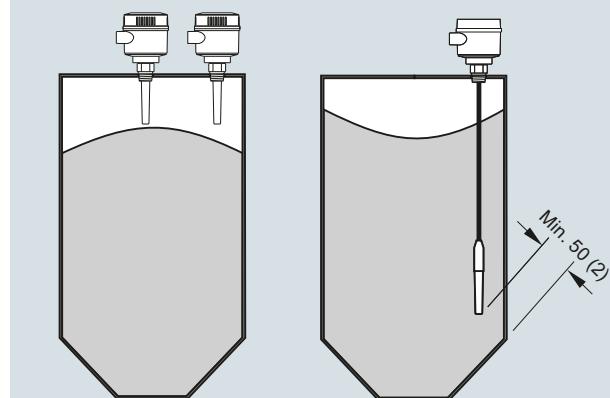

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

Level Measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Technical specifications

Mode of operation		Design
Measuring principle	Inverse frequency shift capacitive level detection	Material • Enclosure • Optional thermal isolator
Input		316L stainless steel Epoxy-coated aluminum with gasket
Measured variable	Change in picoFarad (pF)	Removable terminal block, max. 2.5 mm ²
Output		Degree of protection IP65/Type 4/NEMA 4 (optional IP68)
Output signal	1 SPDT Form C relay	Cable inlet 2 x M20 x 1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)
• Relay output	• 30 V DC	
- Max. contact voltage	• 250 V AC	
- Max. contact current	• 5 A DC	
- Max. switching capacity	• 8 A AC	
- Time delay (ON and/or OFF)	150 W DC	
• Solid-state output	2 000 VA AC	
- Output	1 ... 60 s	
- Protection	Galvanically isolated	
- Max. switching voltage	Against reversed polarity (bipolar)	
- Max. load current	• 30 V DC	General Purpose CSA, FM, CE, RCM
- Voltage drop	• 30 V peak AC	ATEX II 1/2 D T100 °C
- Time delay (pre or post switching)	82 mA	ATEX II 1 G EEx d[ia] IIC T6 ... T4
	< 1 V, typical at 50 mA	ATEX II 1/2 D T100 °C
	1 ... 60 s	Dust Ignition Proof CSA/FM Class II, Div. 1, Groups E, F, G
Rated operating conditions¹⁾		CSA/FM Class III T4
Installation conditions	Indoor/outdoor	Explosion Proof Enclosure With IS Probe CSA/FM Class I, Div. 1, Groups A, B, C, D
• Location		CSA/FM Class II, Div. 1, Groups E, F, G
Ambient conditions		CSA/FM Class III T4
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) ²⁾	Marine Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
• Installation category	II	Overfill Protection WHG (Germany) VLAREM II
• Pollution degree	4	Others Pattern Approval (China), SIL
Medium conditions	Liquids, bulk solids, slurries and interfaces Min. 1.5	
• Relative dielectric constant ϵ_r		
• Process temperature	-40 ... +85 °C (-40 ... +185 °F) ²⁾	
- Without thermal isolator	-40 ... +125 °C (-40 ... +257 °F)	
- With thermal isolator	-1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)	
• Process pressure (rod version)	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)	
• Process pressure (cable version) ³⁾	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)	
• Process pressure (sliding coupling version)		
Electromagnetic compatibility		
	To comply with CE EMC regulations (where applicable); the CLS200 should be installed per the instruction manual.	

¹⁾ When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 4/34.

²⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

³⁾ Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 4/34.

Level Measurement
Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Design: Probe				
	Rod version	Sanitary version	Cable version	Sliding Coupling version
Max. length	5 500 mm (216.53 inch)	5 500 mm (216.53 inch)	<ul style="list-style-type: none"> • 30 000 mm (1 181.1 inch) liquids and slurries • 5 000 mm (196.85 inch) solids (under loads) 	5 500 mm (216.53 inch)
Process connection	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	1 $\frac{1}{2}$ ", 2" sanitary fitting clamp 316L stainless steel	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
Extension material	316L stainless steel optional PFA coated ¹⁾	316L stainless steel	Fluoroethylene propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾
Thermal isolator ³⁾	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length

¹⁾ PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

²⁾ For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit http://www.automation.siemens.com/aspa_app.

³⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

Level Measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Selection and Ordering data		Article No.	Selection and Ordering data	Article No.
Pointek CLS200 - Standard - Rod Version with Threaded or Flanged process connection		7ML5630- 0	Pointek CLS200 - Standard - Rod Version with Threaded or Flanged process connection	7ML5630- 0
Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.			Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.			Add Order code Y01 and plain text: "Insertion length ... mm"	
Process connection				
Threaded, 316L stainless steel				
3/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		Extended rod, 210 ... 1 000 mm (8.27 ... 39.37 inch)	M
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)	N
1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 C		Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)	P
1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]	0 D		Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)	Q
R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A		Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)	R
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B		Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)	S
R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D			
G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A			
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B			
G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D			
Welded flange, 316L stainless steel, raised face				
1" ASME, 150 lb	5 A			
1" ASME, 300 lb	5 B			
1" ASME, 600 lb	5 C			
1 1/2" ASME, 150 lb	5 D			
1 1/2" ASME, 300 lb	5 E			
1 1/2" ASME, 600 lb	5 F			
2" ASME, 150 lb	5 G			
2" ASME, 300 lb	5 H			
2" ASME, 600 lb	5 J			
3" ASME, 150 lb	5 K			
3" ASME, 300 lb	5 L			
3" ASME, 600 lb	5 M			
4" ASME, 150 lb	5 N			
4" ASME, 300 lb	5 P			
4" ASME, 600 lb	5 Q			
Welded flange, 316L stainless steel, Type A flat faced				
DN 25, PN 16	6 A			
DN 25, PN 40	6 B			
DN 40, PN 16	6 C			
DN 40, PN 40	6 D			
DN 50, PN 16	6 E			
DN 50, PN 40	6 F			
DN 80, PN 16	6 G			
DN 80, PN 40	6 H			
DN 100, PN 16	6 J			
DN 100, PN 40	6 K			
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)				
Probe length (length from flange face) (threaded lengths include process thread)		A		
Note: No Y01 needed in Order code for standard lengths		B		
Compact [threaded 120 mm (4.72 inch), Flanged 98 mm (3.86 inch)]		C		
Extended rod, 250 mm (9.84 inch)		D		
Extended rod, 350 mm (13.78 inch)		E		
Extended rod, 500 mm (19.69 inch)		F		
Extended rod, 750 mm (29.53 inch)		G		
Extended rod, 1 000 mm (39.37 inch)		H		
Extended rod, 1 250 mm (49.21 inch)		J		
Extended rod, 1 350 mm (53.15 inch)		K		
Extended rod, 1 500 mm (59.06 inch)		L		
Extended rod, 1 750 mm (68.90 inch)				
Extended rod, 2 000 mm (78.74 inch)				
Enclosure and lid				
Aluminum epoxy coated				
2 x 1/2" NPT via adapter - cable inlet, IP65				
2 x M20 x 1.5 cable inlet IP65				
2 x 1/2" NPT via adapter - cable inlet, IP68				
2 x M20 x 1.5 cable inlet IP68				

¹⁾ Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection

²⁾ Available with Approval options F, G, and H

Level Measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Selection and Ordering data		Order code	Selection and Ordering data	Article No.
<i>Further designs</i>			Pointek CLS200 - Standard - Cable Version with Threaded or Flanged process connection	7ML5631-
Please add "-Z" to Article No. and specify Order code(s).			Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.	-0
Total insertion length: enter the total insertion length in plain text description	Y01		↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15			
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000	C11		Process connection	
Material inspection Certificate Type 3.1 per EN 10204	C12		Threaded, 316L stainless steel	
SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]	C20		% NPT [(Taper), ANSI/ASME B1.20.1] 1" NPT [(Taper), ANSI/ASME B1.20.1] 1½" NPT [(Taper), ANSI/ASME B1.20.1] 1¾" NPT [(Taper), ANSI/ASME B1.20.1] R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	0 A 0 B 0 C 0 D 1 A 1 B 1 D 3 A 3 B 3 D
<i>Operating Instructions</i>			Welded flange, 316L stainless steel, raised face	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation			1" ASME, 150 lb 1" ASME, 300 lb 1" ASME, 600 lb 1½" ASME, 150 lb 1½" ASME, 300 lb 1½" ASME, 600 lb 2" ASME, 150 lb 2" ASME, 300 lb 2" ASME, 600 lb 3" ASME, 150 lb 3" ASME, 300 lb 3" ASME, 600 lb 4" ASME, 150 lb 4" ASME, 300 lb 4" ASME, 600 lb	5 A 5 B 5 C 5 D 5 E 5 F 5 G 5 H 5 J 5 K 5 L 5 M 5 N 5 P 5 Q
<i>Accessories</i>	See page 4/33		Welded flange, 316L stainless steel, type A flat faced	
			DN 25, PN 16 DN 25, PN 40 DN 40, PN 16 DN 40, PN 40 DN 50, PN 16 DN 50, PN 40 DN 80, PN 16 DN 80, PN 40 DN 100, PN 16 DN 100, PN 40	6 A 6 B 6 C 6 D 6 E 6 F 6 G 6 H 6 J 6 K
			(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	
			Probe length (length from flange face) (threaded lengths include process thread)	A
			Note: No Y01 needed in Order code for standard lengths	B
			Extended cable, 3 000 mm (118.11 inch), length can be determined by customer on assembly ¹⁾	C
			Extended cable, 6 000 mm (236.22 inch), length can be determined by customer on assembly ¹⁾	D
			Add Order code Y01 and plain text: "Insertion length ... mm"	E
			Extended cable, 500 ... 5 000 mm (19.69 ... 196.85 inch)	F
			Extended cable, 5 001 ... 10 000 mm (196.89 ... 393.70 inch)	G
			Extended cable, 10 001 ... 15 000 mm (393.74 ... 590.55 inch)	H
			Extended cable, 15 001 ... 20 000 mm (590.59 ... 787.4 inch)	
			Extended cable, 20 001 ... 25 000 mm (787.44 ... 984.25 inch)	
			Extended cable, 25 001 ... 30 000 mm (984.29 ... 1 181.1 inch)	

Level Measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
Pointek CLS200 - Standard - Cable Version with Threaded or Flanged process connection	7ML5631-	<i>Further designs</i>	
Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.	- 0	Please add "-Z" to Article No. and specify Order code(s).	
Thermal isolator	0	Total insertion length: enter the total insertion length in plain text description	Y01
Without thermal isolator	1	Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15
With thermal isolator [for process connection temperatures over 85 °C (185 °F)]		Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000	C11
Remote mount electronics and mounting bracket	2	Material inspection Certificate Type 3.1 per EN 10204	C12
With 2 m (79 inch) of cable ²⁾	3	SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]	C20
With 5 m (197 inch) of cable ²⁾			
Wetted seals	0	Operating Instructions	
FKM and PTFE	1	All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]			
Probe material	0	Accessories	See page 4/33
FEP jacketed cable with PPS probe body	1		
FEP jacketed cable with PVDF probe body			
Approvals			
Dust Ignition Proof: CE, RCM, ATEX II 1/2 D T100 °C	C		
Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	D		
Flameproof Enclosure with IS Probe, with WHG approval: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	E		
Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	F		
Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	G		
General Purpose (CSA, FM)	H		
General Purpose (CE, RCM)	J		
General Purpose (CSA, FM, CE, RCM) with WHG approval	K		
Enclosure and lid	A		
Aluminum epoxy coated	B		
2 x 1/2" NPT via adapter - cable inlet, IP65	C		
2 x M20 x 1.5 cable inlet, IP65			
2 x 1/2" NPT via adapter - cable inlet, IP68	D		
2 x M20 x 1.5 cable inlet, IP68			

¹⁾ Sensor detached to allow customer to set desired cable length

²⁾ Available with Approvals options F ... H

Level Measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Selection and Ordering data		Article No.	Selection and Ordering data	Article No.
Pointek CLS200 - Standard - Rod with Sanitary process connection		7ML5632-	Pointek CLS200 - Standard - Rod with Sanitary process connection	7ML5632-
Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.		- 0	Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.	- 0
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.				
Process connection			Approvals	
Sanitary 316L stainless steel			Dust Ignition Proof: CE, RCM, ATEX II 1/2 D T100 °C	C
1" sanitary fitting clamp	8 A		Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	D
1½" sanitary fitting clamp	8 B		Flameproof Enclosure with IS Probe, with WHG approval: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	E
2" sanitary fitting clamp	8 C		Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	F
2½" sanitary fitting clamp	8 D		Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	G
3" sanitary fitting clamp	8 E		General Purpose (CSA, FM) General Purpose (CE, RCM) General Purpose (CSA, FM, CE, RCM) with WHG approval	H
(Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard)				J
Probe length			Enclosure and lid	K
(length from process connection face)			Aluminum epoxy coated	
Note: No Y01 needed in Order code for standard lengths			2 x ½" NPT via adapter - cable inlet, IP65 2 x M20 x 1.5 cable inlet, IP65	A
Compact, 98 mm (3.86 inch)	A		2 x ½" NPT via adapter - cable inlet, IP68 2 x M20 x 1.5 cable inlet, IP68	B
Extended rod, 250 mm (9.84 inch)	B			C
Extended rod, 350 mm (13.78 inch)	C			D
Extended rod, 500 mm (19.69 inch)	D			
Extended rod, 750 mm (29.53 inch)	E			
Extended rod, 1 000 mm (39.37 inch)	F			
Extended rod, 1 250 mm (49.21 inch)	G			
Extended rod, 1 350 mm (53.15 inch)	H			
Extended rod, 1 500 mm (59.06 inch)	I			
Extended rod, 1 750 mm (68.90 inch)	J			
Extended rod, 2 000 mm (78.74 inch)	K			
Add Order code Y01 and plain text: "Insertion length ... mm"	L			
Extended rod, 110 ... 350 mm (4.3 ... 13.78 inch)	M			
Extended rod, 351 ... 1 000 mm (13.78 ... 39.37 inch)	N			
Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)	P			
Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)	Q			
Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)	R			
Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)	S			
Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)	T			
Thermal isolator	0			
Without thermal isolator	1			
With thermal isolator [for process connection temperatures over 85 °C (185 °F)]				
Remote mount electronics and mounting bracket	2			
Remote mount electronics with 2 m (79 inch) of cable	3			
Remote mount electronics with 5 m (197 inch) of cable	0			
Wetted seals	1			
FKM				
FFKM				
[for process temperatures above -20 °C (-4 °F)]				
Probe material	0			
316L stainless steel with PPS probe body	1			
316L stainless steel with PVDF probe body				
Selection and Ordering data			Accessories	See page 4/33
Further designs				
Please add "-Z" to Article No. and specify Order code(s).				
Total insertion length: enter the total insertion length in plain text description				
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text				
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000				
Material inspection Certificate Type 3.1 per EN 10204				
SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]				
Operating Instructions				
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation				

4

Level Measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Selection and Ordering data	Article No.	Selection and Ordering data	Article No.
Pointek CLS200 - Standard - Sliding Coupling with Threaded process connection	7ML5633- 0	Pointek CLS200 - Standard - Sliding Coupling with Threaded process connection	7ML5633- 0
Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.		Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.			
Process connection		Approvals	
Threaded, 316L stainless steel		Dust Ignition Proof: CE, RCM, ATEX II 1/2 D T100 °C	C
% NPT [(Taper), ANSI/ASME B1.20.1]	0 A	Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	D
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B	Flameproof Enclosure with IS Probe, with WHG approval: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	E
1/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 C	Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	F
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D	Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	G
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A	General Purpose (CSA, FM)	H
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B	General Purpose (CE, RCM)	J
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D	General Purpose (CSA, FM, CE, RCM) with WHG approval	K
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A		
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B		
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D		
Probe length (length from flange face) (threaded lengths include process thread)	C D E F G H J K L	Enclosure and lid Aluminum epoxy coated 2 x ½" NPT via adapter - cable inlet, IP65 2 x M20 x 1.5 cable inlet, IP65 2 x ½" NPT via adapter - cable inlet, IP68 2 x M20 x 1.5 cable inlet, IP68	A B C D
Note: No Y01 needed in Order code for standard lengths			
Extended rod, 350 mm (13.78 inch)	M	1) Available with Approvals options F ... H	
Extended rod, 500 mm (19.69 inch)	N		
Extended rod, 750 mm (29.53 inch)	P		
Extended rod, 1 000 mm (39.37 inch)	Q		
Extended rod, 1 250 mm (49.21 inch)	R		
Extended rod, 1 350 mm (53.15 inch)	S		
Extended rod, 1 500 mm (59.06 inch)			
Extended rod, 1 750 mm (68.90 inch)			
Extended rod, 2 000 mm (78.74 inch)			
Add Order code Y01 and plain text: "Insertion length ... mm"			
Extended rod, 350 ... 1 000 mm (13.78 ... 39.37 inch)			
Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)			
Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)			
Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)	0		
Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)	1		
Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)	2		
Thermal isolator	3		
Without thermal isolator	0		
With thermal isolator [for process connection temperatures over 85 °C (185 °F)]	1		
Remote mount electronics and mounting bracket	0		
With 2 m (79 inch) of cable ¹⁾	1		
With 5 m (197 inch) of cable ¹⁾	0		
Wetted seals	1		
FKM and PTFE	0		
FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]	1		
Probe material	0		
316L stainless steel with PPS probe body	1		
316L stainless steel with PVDF probe body	0		
Selection and Ordering data		Order code	
Further designs			
Please add "-Z" to Article No. and specify Order code(s).			
Total insertion length: enter the total insertion length in plain text description	Y01		
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15		
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000	C11		
Material inspection Certificate Type 3.1 per EN 10204	C12		
SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]	C20		
Operating Instructions			
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation			
Accessories		See page 4/33	