

Overview



SITRANS Probe LU is a 2-wire loop powered ultrasonic transmitter for level, volume and flow monitoring of liquids in open channels, storage vessels, and simple process vessels.

Benefits

- Continuous level measurement up to 12 m (40 ft) range
- Easy installation and simple startup
- Programming using infrared Intrinsically Safe handheld programmer, SIMATIC PDM or HART Communicator
- Communication using HART or PROFIBUS PA
- ETFE or PVDF transducers for chemical compatibility
- Sonic Intelligence signal processing
- Auto False-Echo Suppression for fixed obstruction avoidance
- Level to volume or level to flow conversion

Application

The SITRANS Probe LU is ideal for level monitoring in the water and wastewater industry, chemical storage vessels, and small bulk hoppers.


The range of SITRANS Probe LU is 6 or 12 m (20 or 40 ft). Using Sonic Intelligence, Auto False Echo Suppression for fixed obstruction avoidance, and accuracy of 0.15 % of range or 6 mm (0.25 inch), the Probe LU provides unmatched reliability.

The Probe LU offers two communications options: HART or PROFIBUS PA (Profile version 3.0, Class B).

The transducer on the Probe LU is available as ETFE or PVDF to suit the chemical conditions of your application. As well, for applications with varying material and process temperatures, the Probe LU incorporates an internal temperature sensor to compensate for temperature changes.

- Key Applications: chemical storage vessels, filter beds, liquid storage vessels

Configuration

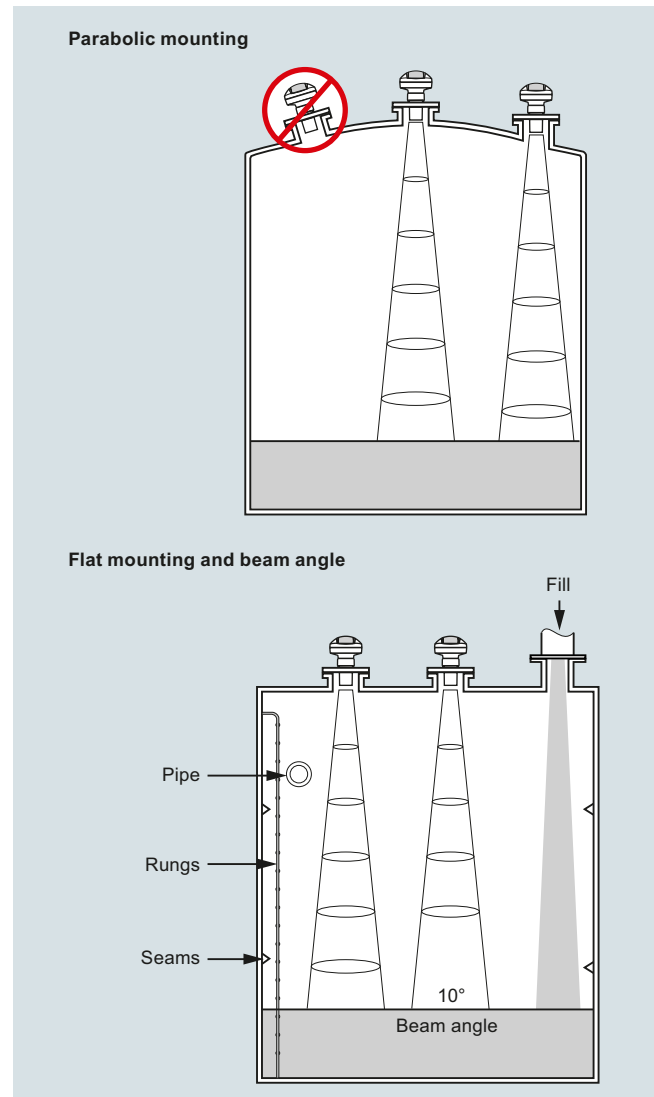

SITRANS Probe LU mounting

Level Measurement

Continuous level measurement
Ultrasonic transmitters

SITRANS Probe LU

Technical specifications

Mode of operation		Process connection	
Measuring principle	Ultrasonic level measurement	Threaded connection	2" NPT [(Taper), ANSI/ASME B1.20.1] R 2" [(BSPT), EN 10226] or G 2" [(BSPP), EN ISO 228-1]
Typical application	Level measurement in storage vessels and simple process vessels	Flange connection	3 inch (80 mm) universal flange
Inputs		Other connection	FMS 200 mounting bracket (see page 4/193) or customer supplied mount
Measuring range		Display and Controls	
• 6 m (20 ft) model	0.25 ... 6 m (10 inch ... 20 ft)	Interface	Local: LCD display with bar graph Remote: Available via HART or PROFIBUS PA
• 12 m (40 ft) model	0.25 ... 12 m (10 inch ... 40 ft)	Configuration	Using Siemens SIMATIC PDM (PC) or HART handheld communicator or Siemens infrared handheld programmer
Frequency	54 kHz	Memory	Non-volatile EEPROM
Outputs		Power supply	
mA/HART		4 ... 20 mA/HART	Nominal 24 V DC with 550 Ω maximum; maximum 30 V DC 4 ... 20 mA
• Range	4 ... 20 mA	PROFIBUS PA	12, 13, 15, or 20 mA depending on programming (General Purpose or Intrinsically Safe version) per IEC 61158-2
• Accuracy	± 0.02 mA	Certificates and Approvals	
PROFIBUS PA	Profile 3, Class B	General	
Performance		CSA _{US/C} , FM, CE, RCM	
Resolution	≤ 3 mm (0.12 inch)	Marine (only applies to HART communication option)	
Accuracy	± the greater of 0.15 % of range or 6 mm (0.24 inch)	• Lloyd's Register of Shipping • ABS Type Approval	
Repeatability	≤ 3 mm (0.12 inch)	Hazardous	
Blanking distance	0.25 m (10 inch)	• Intrinsically Safe (Europe)	
Update time	≤ 5 s	ATEX II 1G Ex ia IIC T4 Ga	
• 4/20 mA/HART version	≤ 5 s at 4 mA	• Intrinsically Safe (USA/Canada)	
• PROFIBUS version	≤ 4 s at 15 mA current loop	CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4	
Temperature compensation	Built-in to compensate over temperature range	• Intrinsically Safe (International)	
Beam angle	10°	SIR 13.0008X Ex ia IIC T4 Ga	
Rated operating conditions		• Intrinsically Safe (Brazil)	
Ambient conditions		INMETRO Ex ia IIC T4 Ga	
• Location	Indoor/outdoor	• Non-incendive (USA)	
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)	FM Class I, Div. 2, Groups A, B, C, D T4	
• Relative humidity/ingress protection	Suitable for outdoor	Handheld Programmer	
• Installation category	I	Intrinsically Safe Siemens handheld programmer	
• Pollution degree	4	• Approvals for handheld programmer	
Medium conditions		ATEX II 1GD / IECEx SIR 09.0073	
• Temperature at flange or threads	-40 ... +85 °C (-40 ... +185 °F)	Ex ia IIC T4 Ga	
• Pressure (vessel)	0.5 bar g (7.25 psi g)	Ex iaD 20 T135 °C	
Design		FM/CSA Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G T6	
Material (enclosure)	PBT (Polybutylene Terephthalate)	Ambient temperature	
Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6/IP67/IP68 enclosure	-20 ... 50 °C (-5 ... 122 °F)	
Weight	2.1 kg (4.6 lb)	Interface	
Cable inlet	2 x M20 x 1.5 cable gland or 2 x ½" NPT thread or 1 x M20 x 1.5 and 1 x ½" NPT	Proprietary infrared pulse signal	
Material (transducer)	Buna-N seal with ETFE (Ethylene Tetrafluoroethylene) or PVDF (Polyvinylidene Fluoride)	Power	
		3 V lithium battery (non-replaceable)	

Level Measurement
Continuous level measurement
Ultrasonic transmitters

SITRANS Probe LU

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
SITRANS Probe LU 2-wire, loop powered ultrasonic transmitter for level, volume and flow monitoring of liquids in open channels, storage vessels, and simple process vessels. ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	↗ 7ML5221- 	Further designs Please add "-Z" to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]; Measuring-point number/identification (max. 27 characters) specify in plain text	Y15
Enclosure/Cable Inlet Plastic (PBT), 1 x M20 x 1.5 and 1 x 1/2" NPT (no cable glands supplied) Plastic (PBT), 2 x M20 x 1.5 (includes 1 general purpose cable gland: 7ML1930-1AM) Plastic (PBT), 2 x 1/2" NPT (no cable glands supplied)	0 1 2	Operating Instructions for HART/mA device English Note: The Operating Instructions should be ordered as a separate item on the order. All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	Article No. A5E32337695
Range/Transducer material 6 m (20 ft), ETFE 6 m (20 ft), PVDF Copolymer 12 m (40 ft), ETFE 12 m (40 ft), PVDF Copolymer	A B C D	Accessories Handheld programmer, Intrinsically Safe, EEx ia Handheld programmer, General Purpose approvals Handheld programmer, Infrared, Intrinsically Safe, PROFIBUS PA HART modem/USB (for use with a PC and SIMATIC PDM) 2" NPT locknut, plastic 2" BSPT locknut, plastic 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" NPT 3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" BSPT One General Purpose polymeric cable gland M20 x 1.5, rated for -20 ... +80 °C (-4 ... +176 °F) One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) for General Purpose or ATEX EEx e installations (available for HART only) One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA) Universal box bracket, FMS-200 Probe LU rock guard and sunshield SITRANS RD100, loop powered display - see Chapter 7 SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7 For applicable back up point level switch see point level measurement section.	7ML5830-2AH A5E36563512 7ML5830-2AJ 7MF4997-1DB 7ML1830-1DT 7ML1830-1DQ 7ML1830-1BT 7ML1830-1BU 7ML1930-1AM 7ML1930-1AP 7ML1930-1AQ 7ML1830-1BK 7ML1930-1GH 7ML5741-... 7ML5740-... 7ML5744-... 7ML5750-...
Process connection 2" NPT [(Taper), ANSI/ASME B1.20.1] R 2" [(BSPT), EN 10226] G 2" [(BSPP), EN ISO 228-1]	A B C	Spare Parts Plastic lid	7ML1830-1KB
Communication/Output 4 ... 20 mA, HART PROFIBUS PA	1 2		
Approvals General Purpose, FM, CSA _{US/C} , CE, RCM, KCC Non-incendive, FM Class I, Div. 2, Groups A, B, C, D T5 ¹⁾ Intrinsically Safe, CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4 ²⁾ Intrinsically Safe ATEX 1G / IECEx / INMETRO Ex ia IIC T4 Ga, RCM, KCC ²⁾ Intrinsically Safe ATEX 1G / IECEx / INMETRO Ex ia IIC T4 Ga, RCM, KCC ³⁾ Intrinsically safe, CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4 ³⁾	1 4 5 6 7 8		

1) Available with Enclosure/Cable Inlet option 2 only.
 2) Available with Communication option 2 only.
 3) Available with Communication option 1 only.




Level Measurement

Continuous level measurement
Ultrasonic transmitters

SITRANS Probe LU


Options

Flange adapter for mating 2" NPT or 2" BSP process connections to 3" ASME, DN 65 PN 10 and JIS 10K 3B flanges

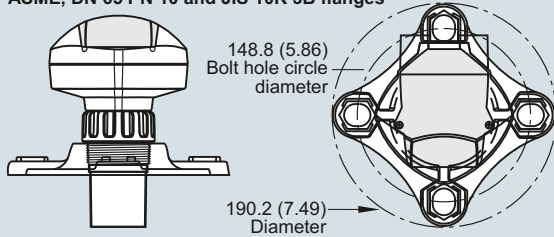

SITRANS Probe LU optional flange adapter, dimensions in mm (inch)


SITRANS Probe LU with FMS 200 universal box bracket

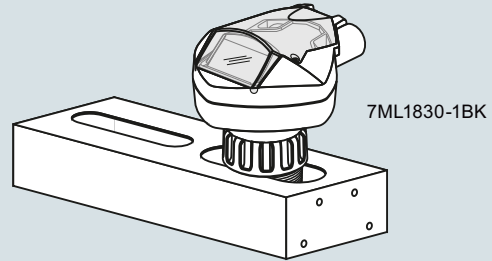

SITRANS Probe LU with optional mounting bracket

4


Dimensional drawings

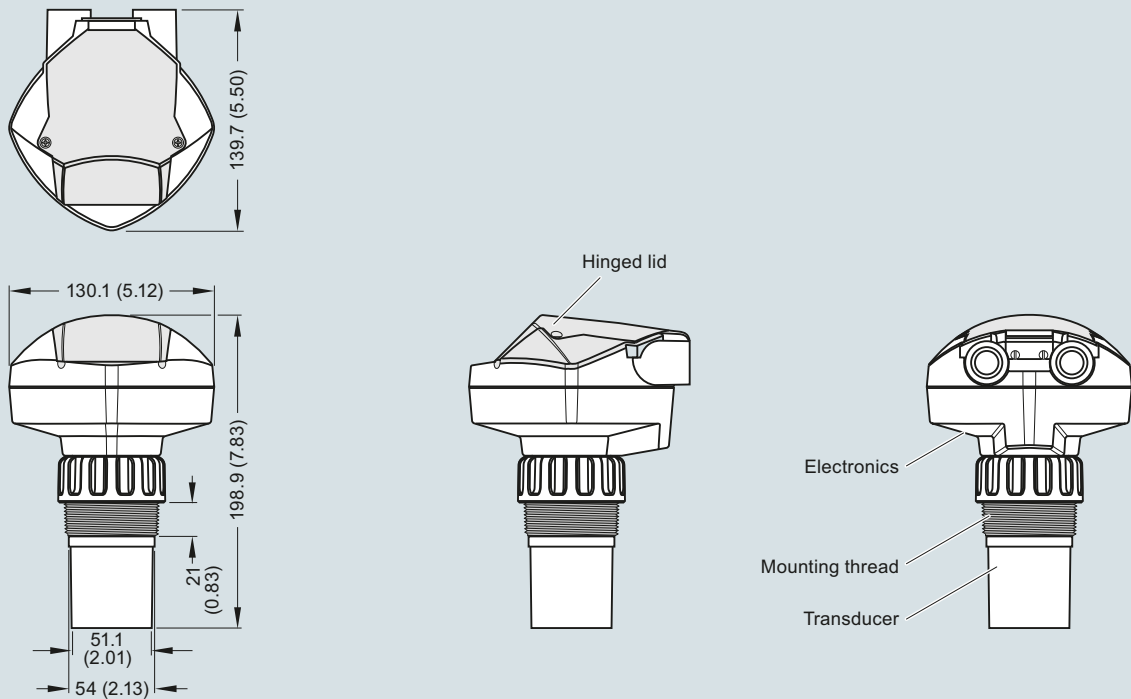

Note: Above model is shown without M20 cable glands or 1/2" NPT conduit connectors.

SITRANS Probe LU, dimensions in mm (inch)

Circuit diagrams

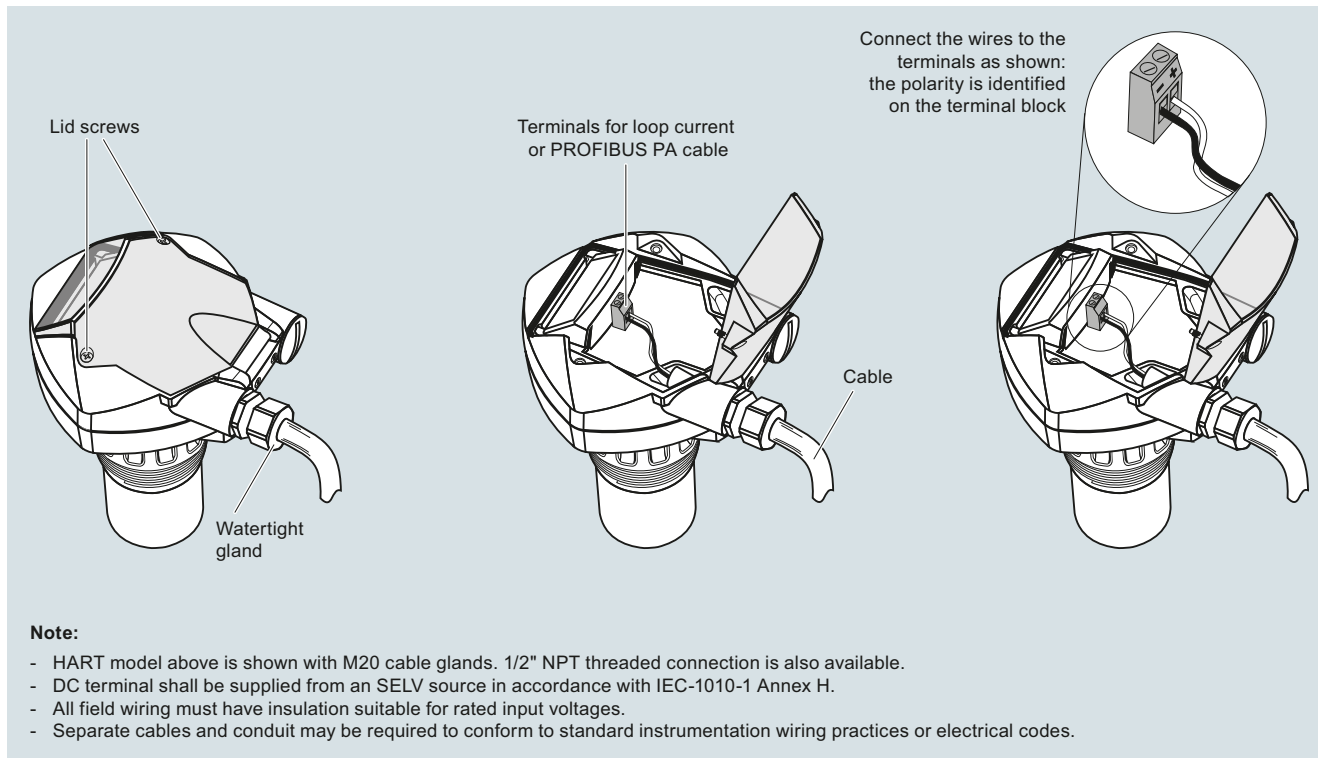

SITRANS Probe LU connections